



LR1.5 Phecda R

Linear Recessed Light

1.5" | 441 lumen/ft | 23W/ft



Specification Sheet

| |
|----------------|
| Project Name : |
| Location : |
| Quantity : |
| Date : |
| Note : |


Feature

The minimalist linear recessed design of Line collection offers a contemporary appeal and a pleasant ambient light. It is available in surface mount, Wall mount or suspended versions. The acrylic diffuser, enclosed in an extruded aluminum housing, evenly distributes the light and totally eliminates bright dots. The Line comes in a range of sizes from 4 feet and 8 feet to adapt to various ceiling areas.

Specification

- **CRI:** 90+
- **Beam Angle:** 93°
- **IP Grade:** IP40
- **Efficiency:** 415~441lm/ft
- **Dimming:** ELV/0-10V
- **Dimming Range::** 1~100%
- **Operating Temperature:** -20°C ~ +45°C
- **Certification:** cETLus
- **Warranty:** 5 years

Size



Order Information



Example: LR1.5-4-30K-BK-E-EMC

| Model | Length | Color Temperature | Finish | Dimming | Options |
|-----------------------|--|--|--|--|-------------------------------|
| LR1.5 | | | | | |
| Linear Recessed Light | 4 - 4 Feet 8 - 8 feet | 30K - 3000K 35K - 3500K 40K - 4000K | BK - Black WH - White | E - ELV/Triac Dimming V - 0-10V Dimming | EMC - Emergency Driver |

Performance


| Size | CCT | Power[W] | Lumen[lm] |
|------------|-------|----------|-----------|
| 4ft | 3000K | 23 | 1660 |
| | 3500K | 23 | 1711 |
| | 4000K | 23 | 1763 |
| 8ft | 3000K | 46 | 3320 |
| | 3500K | 46 | 3423 |
| | 4000K | 46 | 3526 |

Photometric Data



LR1.5 Linear Recessed Light

Installation Accessories



- N Shape clip



R5536-BI



- Rubber sucker




L-DA-A

Cut Out


| Length | Width |
|------------------|---------------|
| 4' 3/8" (1229mm) | 1 7/8" (47mm) |
| 8' 3/8" (2448mm) | 1 7/8" (47mm) |

Installation step


- (1) Drill installation holes and wiring hole as per scale by "L".

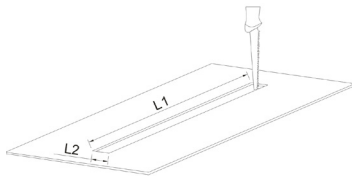

- (2) Remove diffuser, and then install N shape clips.

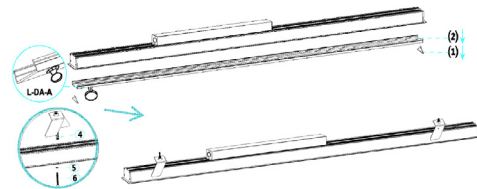


- (3) Connect the lamp input line in outlet box according to the color mark corresponding to the city electricity and dimming signal line, strain relief device need to be used before cord entry the outlet box during installation.

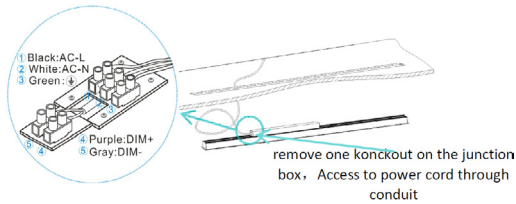


Explain: connect to 1, 2, 3 only if do not need to use dimming function, no need to connect 4, 5.

- (4) Fasten lighting fixture in the slot.

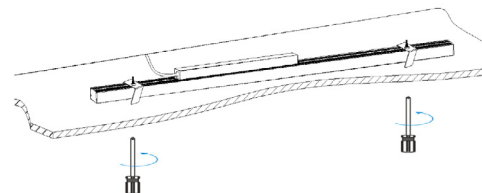

- (5) Assemble diffuser and anti-lightleak clips.

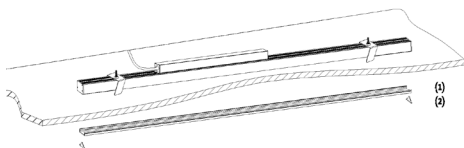

- (6) Complete installation.

