

6 Inch Recessed Commercial Downlight

Contractor's Choice


Features

- Integrated LED light source
- Integrated driver junction box
- Satin finish anodized aluminum baffle trim
- Glare control acrylic pyramid diffuser
- Quick connect push-in terminals
- Dimmable with Triac/ELV dimmers



(RCD6-20)

Dimensions

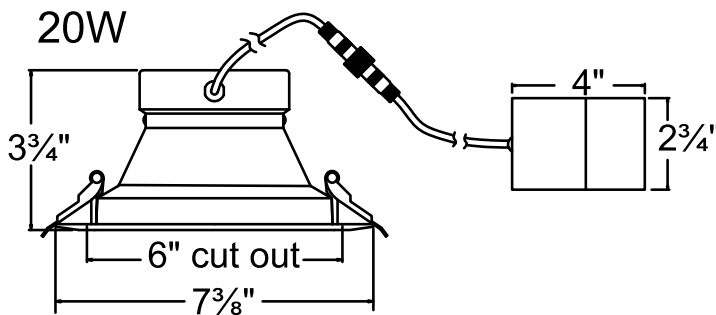

Specifications

Wattage: 20W

Voltage: 120 VAC

Fixture Light Output: 80 Lumens/Watt

Colour Temperature: Field Selectable

2700K/3000K/3500K

4000K/5000K

CRI: >90

IP Rating: IP24 Dry Locations

Beam Angle: 70°

Rated Life Span: 50,000 hrs

Operation Temp.: -20°C to 50°C

Dimming Types: Triac/ELV Dimmers

IC Rated: Yes

Air Tight: Yes

Safety Listing: cULus

Warranty: 5 year Limited

