



# LR3 Phecda R

Linear Recessed Light

3" | 3285 lumen/ft | 8.5W/ft



Project Name :
Location :
Quantity :
Date :
Note :


## Feature

The minimalist linear recessed design of Line collection offers a contemporary appeal and a pleasant ambient light. It is available in surface mount, Wall mount or suspended versions. The acrylic diffuser, enclosed in an extruded aluminum housing, evenly distributes the light and totally eliminates bright dots. The Line comes in a range of sizes from 4 feet and 8 feet to adapt to various ceiling areas.

## Specification

- **CRI:** 90+
- **Beam Angle:** 99°
- **IP Grade:** IP40
- **Efficiency:** 3090~3285lm/ft
- **Dimming:** ELV/0-10V
- **Dimming Range::** 1~100%
- **Operating Temperature:** -20°C ~ +45°C
- **Certification:** cETLus
- **Warranty:** 5 years

## Size



## Order Information



Example: LR3-4-30K-BK-E-EMC

Model	Length	Color Temperature	Finish	Dimming	Options
<b>LR2.5</b>					
Linear Recessed Light	<b>4</b> - 4 Feet <b>8</b> - 8 feet	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>BK</b> - Black <b>WH</b> - White	<b>E</b> - ELV/Triac Dimming <b>V</b> - 0-10V Dimming	<b>EMC</b> - Emergency Driver

## Performance

Size	CCT	Power[W]	Lumen[lm]
<b>4ft</b>	3000K	34	3088
	3500K	34	3184
	4000K	34	3279
<b>8ft</b>	3000K	68	6176
	3500K	68	6367
	4000K	68	6558

## Photometric Data




### Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance ± 10%



## Installation Accessories



- N Shape clip



R5536-BI



- Rubber sucker




L-DA-A

## Cut Out


Length	Width
4' 3/8" (1229mm)	1 7/8" (47mm)
8' 3/8" (2448mm)	1 7/8" (47mm)

## Installation step


- (1) Drill installation holes and wiring hole as per scale by "L".

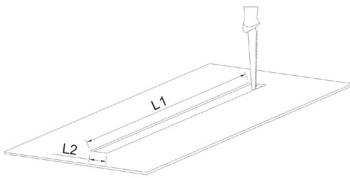

- (2) Remove diffuser, and then install N shape clips.

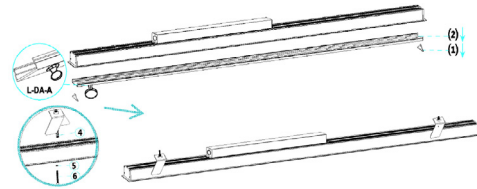


- (3) Connect the lamp input line in outlet box according to the color mark corresponding to the city electricity and dimming signal line, strain relief device need to be used before cord entry the outlet box during installation.

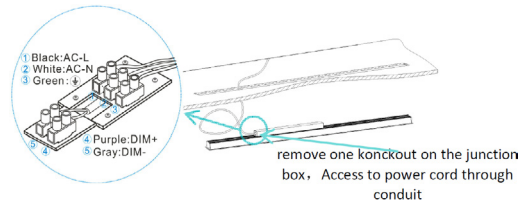


Explain: connect to 1, 2, 3 only if do not need to use dimming function, no need to connect 4, 5.

- (4) Fasten lighting fixture in the slot.

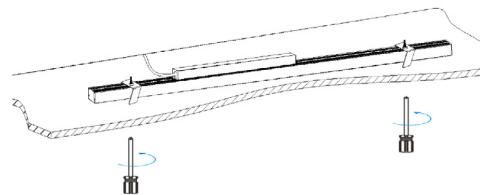

- (5) Assemble diffuser and anti-lightleak clips.

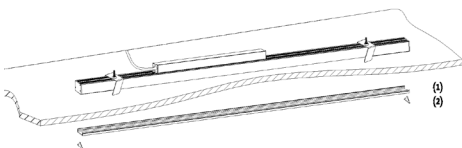

- (6) Complete installation.

