


Full Spectrum LED Strip Light

Contractor's Choice


Features

- Full spectrum, super colour saturation (Rg>100)
- Single Bin, sorting according to SDCM 3
- 0.3mm copper FPC for extra heat dissipation
- Dimmable with constant voltage dimming drivers
- 160 LED/m High emitter density for even light distribution
- 3M adhesive tape backing

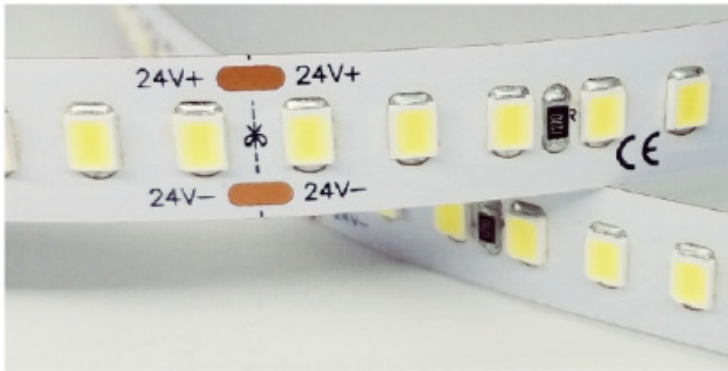

(2835-24V-160-30-IP20)

Dimensions

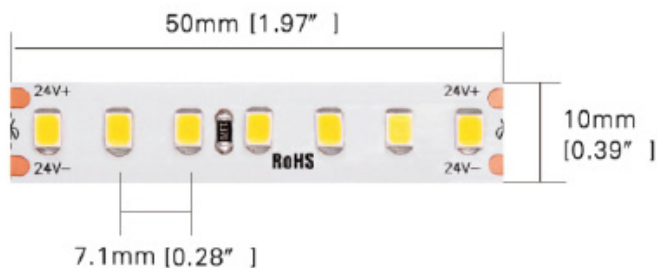

Specifications

Strip width: 0.31 in (8 mm)

Roll length: 16.4 ft (5 m)

Cut unit: 2 inch (50 mm)

Wattage: 4.4 W/ft

Constant Voltage: 24V

Lumen Output: 423 lumens/ft

Efficacy: 97 lumens/W

Colour Temperatures: 2700K/3000K/4000K

Colour fidelity: Rf>85%

Colour saturation: Rg>102%

Duv: Duv<0

CRI: Ra>90%

Beam Angle: 120°

Rated Life Span: 50,000 hrs

Operation Temp.: -20°C to 50°C

Safety Listing: cULus

Warranty: Five year Limited

